

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BS00-007

Total Pages in this Submission
42

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

CELLULAR COMMUNICATIONS DRIVE TEST SYSTEM AND METHOD

and invented by:

Daniel E. MARTIN

jc922 U.S. PTO
09/670195
09/26/00

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 09/604,755

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 27 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BS00-007

Total Pages in this Submission
42

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 8 (EIGHT)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Specify Label No.): _____

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BS00-007

Total Pages in this Submission
42

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	32	- 20 =	12	x \$18.00	\$216.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) _____					
TOTAL FILING FEE					\$906.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-1390 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$906.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Lawrence D. Eisen
Registration No. 41,009
SHAWPITTMAN
2300 N Street, N.W.
Washington, D.C. 20037

Dated: September 26, 2000

cc:

APPLICATION FOR UNITED STATES LETTERS PATENT

for

**CELLULAR COMMUNICATIONS DRIVE TEST
SYSTEM AND METHOD**

by

DANIEL E. MARTIN

Shaw Pittman
2300 N Street, N.W.
Washington, D.C. 20037
(202) 663-8000

Attorney Docket No.: BS00-007

954992

CELLULAR COMMUNICATIONS DRIVE TEST SYSTEM AND METHOD

This application is a continuation-in-part application of U.S. Application Ser.

5 No. 09/604,755, filed June 28, 2000, which is incorporated by reference herein.

BACKGROUND

Field of the Invention

10 The present invention is directed to management, testing and maintenance of cellular telephone systems. More particularly, the present invention is directed to a system and method for (i) remotely monitoring the call parameters of a mobile cellular telephone call and (ii) displaying those parameters in a dynamic graphical form in real or near real time, wherein the graphical form also includes the mobile
15 cellular telephone's location.

Background of the Invention

Unfettered mobile telephone network access, call continuity and call clarity are some of the technical considerations that are continually optimized to achieve a high level of mobile cellular telephone service. To achieve improved performance
20 levels, cellular telephone service providers must position antennas in geographically desirable locations and tune and/or direct the antennas in optimal ways. While radio frequency (RF) engineering tools exist to help properly position individual cellular telephone cell site antennas and configure overall cellular systems, the only effective way of actually determining whether the cellular antennas and their
25 tuning/positioning have been properly accomplished is to perform field tests with a

cellular telephone. Typically, such field tests are accomplished with “drive tests” wherein an RF or cellular engineer drives a vehicle around in a designated area while making one or more telephone calls using his mobile cellular telephone.

During the drive test, the RF engineer monitors call performance by noting call drops, for example, and/or collecting actual downlink data such as signal strength directly from the mobile telephone. Test equipment for performing such tests is manufactured by, for example, X-Tel, Comarco and LCC.

The RF engineer then returns to his office where he uploads the collected data to, e.g., a computer spreadsheet program, and attempts to combine or correlate this data with data, from the same time period as the drive test, obtained from the cellular system’s controller or switch, i.e., a Mobile Telephone Switching Office (MTSO) or Mobile Switching Center (MSC). The data from the switch might include signal strength, Bit Error Rate (BER) and other call events, such as call handoffs, during the time that the RF engineer was performing the drive test.

Once an analysis of the combined data is complete and changes to the cellular system are made (if necessary), the RF engineer will typically return to the drive test area to confirm that the changes made have improved overall system performance. The iterative procedure of drive testing, system changing, and subsequent drive test confirmation continues as long as cellular system subscribers (users) complain about inadequate service or it is believed that improved service, e.g., coverage and continuity, can be achieved.

While the drive test is an effective method for confirming and testing system performance, it is also an extremely inefficient exercise, in terms of time, for an RF engineer. Instead of spending valuable time making calculations and studying data to optimize a cellular system in an office setting, the RF engineer might spend half or even up to two thirds of his day driving to, around and from an area under investigation. This drive test time factor is even more pronounced if the RF engineer must travel to a rural area to investigate customer complaints and/or perform routine system checks. Thus, the drive testing conventionally employed to monitor and upgrade a cellular system's performance wastes an RF engineer's valuable time.

Moreover, even if the data collected by the RF engineer and the switch data are combined in a useful manner for analysis, it is very difficult to ascertain from the foregoing data set the actual location of the mobile telephone at any given time. Such information, however, can be critical to determine precisely where the cellular system has inadequate service. That is, it is important to know, for example, the precise geographical location at which a call drop occurs. However, having only data collected from the mobile telephone and data from the switch cannot provide accurate position location information.

Additionally, the data that is collected from the mobile telephone and switch is often rather "cryptic." Specifically, while individual parameters such as signal strength, BER, etc. are recorded over time by the switch (and where possible, by the mobile telephone itself), these parameters are output from the switch (and/or mobile

telephone) as numeric or text data, which is difficult to understand unless one has extensive knowledge of the various codes and formats employed. Figure 1 shows a typical “feed” of data from a switch. This intelligibility difficulty is compounded by the fact that cellular system providers often deploy switches from different manufactures, e.g., Hughes, Lucent or Ericsson, and each of these manufacturers provides call information data in different formats and in different orders. This makes it particularly difficult to fully appreciate the data that is available, let alone to properly correlate the call information data from the switch with the mobile telephone data, if any, for analysis.

SUMMARY OF THE INVENTION

To overcome the deficiencies in the conventional methods described above, the present invention provides a system and method whereby the RF engineer need not himself conduct a drive test. Instead, someone else can perform the drive test while the RF engineer remotely accesses the Mobile Telephone Switching Office (MTSO) or Mobile Switching Center (MSC) (“the switch”), places the switch in a call monitor mode and captures telephone call information from both the switch and the mobile telephone (when the cellular system is a digital system) without ever having to leave his office. In addition, the location of the mobile telephone is tracked using data obtained from the Global Positioning System (GPS).

The present invention further provides a single, easy to follow, graphical presentation of the captured call information, including geographic position, even

though the switches or mobile telephone manufacturer's equipment from which the call monitor information is obtained might vary.

More specifically, the present invention comprises an executable program that runs on a computer, e.g., a personal computer (PC) or workstation. The workstation preferably includes a modem or other communications link whereby the workstation can dial up the switch, issue commands to the switch to cause the switch to collect or capture call information for a particular Mobile Identification Number (MIN), and download that call information to the workstation.

The present invention further comprises a GPS receiver in communication with the mobile cellular telephone that is being monitored. Preferably, the GPS receiver is either mounted on the vehicle in which the mobile telephone is located or is a handheld unit that is in close proximity to the user of the mobile telephone. The location information, and preferably time stamp, received by the GPS receiver is passed through an interface unit that combines received latitude/longitude/time information with reverse channel transmissions emanating from the mobile phone.

Upon receipt of the call information and latitude/longitude/time information (via the switch), the executable program parses the call information depending on the format and order of the call information received in accordance with switch type that has been accessed, converts and/or scales the call information as necessary, loads the resulting data and latitude/longitude/time information into a file using a standard file format, and then graphically displays the data stored in the file, such

that the displayed data changes dynamically as new call information data is received.

Preferably, the standard file format includes a mobile service subscriber's number, e.g., a mobile identification number (MIN), the cell site that is presently
5 serving the mobile phone, the channel that is being used, forward and reverse signal strengths, forward and reverse bit error rates, and latitude/longitude/time information.

The standard file format preferably also includes the reverse signal strength at several other cell sites, and most preferably up to 24 cell site neighbors that are
10 in close proximity to the serving cell, in accordance with the digital EIA/TIA 136 specification.

The data stored in the standard file format is then displayed using a graphical user interface including a graphical representation of the data along with alphanumeric information. That is, the retrieved data is displayed in a graphical,
15 dynamic format on a computer display for the user to analyze. The graphical format preferably also includes a map that indicates the location of the mobile cellular telephone.

With the present invention, the RF or cellular engineer no longer needs, himself, to conduct drive tests. Rather, a driver other than the RF engineer can be
20 sent to conduct a drive test while the RF engineer remotely monitors the call from his office. Alternatively, mobile telephones can be pre-positioned in several vehicles

(e.g., buses, taxis, and the like) and configured to be in an auto-answer mode, whereby each phone can be monitored as desired.

It is therefore an object of the present invention to provide a cellular communications drive test system and method that captures, from a switch, in real
5 or near real time, call performance information.

It is another object of the present invention to reformat the captured call performance information into a standard format that can be used for all switch types.

It is yet another object of the present invention to provide a cellular communications drive test system and method that dynamically displays call
10 performance information as it is received.

It is another object of the present invention to remotely access a cellular switch and cause it to record and send call performance information for a particular mobile telephone call.

15 It is also an object of the present invention to provide a cellular communications drive test system and method wherein persons other than RF engineers perform cellular system drive tests.

It is a further object of the present invention to provide a cellular communications drive test system and method that provides a single graphical user
20 interface for call performance information that is obtained via and/or from a switch.

It is another object of the present invention to provide a cellular communications drive test system and method that provides a graphical user interface that not only displays call performance data, but also displays the location of the cellular telephone being monitored.

5 These and other objects of the present invention will become apparent upon a reading of the following detailed description in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Figure 1 is a selected portion of downloaded mobile telephone call information obtained from a switch.

Figure 2 schematically illustrates the preferred embodiment of the present invention including an optional component of additional computer and mobile cellular telephone.

15 Figure 3 is an exemplary standard file format in accordance with the preferred embodiment of the present invention.

Figures 4a and 4b are exemplary displays generated by the preferred embodiment of the present invention for presenting call information only.

20 Figure 5 is another exemplary display generated by the preferred embodiment of the present invention in which both call information and location information are displayed.

Figure 6 is yet another exemplary display generated by the preferred embodiment of the present invention in which call information along a particular path of a vehicle is presented.

Figure 7 is a flowchart depicting the method of the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Figure 2 schematically illustrates the preferred embodiment of the present invention in which a plurality of cell sites 10a, 10b are in communication with a Mobile Telecommunications Switching Office (MTSO) 12, also sometimes referred to by those skilled in the art as a Mobile Switching Center (MSC), but generally referred to herein as a “switch”. Cell sites 10a, 10b monitor signals transmitted by mobile telephone 14 and pass relevant information to the switch, all in conventional manner. This information typically includes signal strength parameters, and bit error rate (BER) information. Based on this received information, the switch assigns a particular cell site, e.g., 10a, to be the present or next (after a handoff) serving cell for a call initiated or to be received by mobile telephone 14.

Also shown in Figure 2 is a workstation 20, such as a personal computer (PC), on which a program for executing the present invention preferably resides. The program, identified as drive test application 24, is preferably run in combination with well-known modules available in, e.g., Visual BASIC, for performing graphics functions, such as those described below. Workstation 20 is in communication with switch 12 via links 22a and 22b, which may be dedicated

telephone lines or any other suitable communication pathway, including wireless links, that permit workstation 20 to communicate with switch 12. Preferably, information about the cellular system, e.g., neighbor cell site signal strengths, is provided via link 22a, whereas specific call information, e.g., BER, related to mobile telephone 14 is provided via link 22b. Of course, those skilled in the art will appreciate that links 22a, 22b could be combined in a single communication pathway between switch 12 and workstation 20. Where necessary, workstation 20 may include a modem (not shown) for effecting communication over the link(s).

In accordance with the present invention, workstation 20 accesses switch 12 to place the switch in a call monitor mode whereby switch 12, upon receiving the appropriate command(s), begins recording call information for a particular mobile call. In the preferred embodiment, the user of workstation 20 identifies a Mobile Identification Number (MIN), e.g., a mobile telephone's telephone number, and uploads that MIN to switch 12. After the MIN is uploaded, switch 12 records call parameter information related to calls being routed to/from the mobile telephone having the identified MIN, e.g., mobile telephone 14.

As is well-known in the art, mobile telephone 14 can also be placed in an automatic call answer mode whereby after, e.g., two rings, the mobile phone automatically answers without intervention by a user. Thus, in accordance with a particular implementation of the present invention, a plurality of mobile telephones 14 are carried by/mounted to, respectively, a plurality of service vehicles such as taxi cabs, delivery trucks, busses and the like, which are always traveling

throughout a metropolitan area. The user of workstation 20 can then initiate a call to any one of these mobile telephones, monitor call parameter information, and repeat these action as many times as desired.

Figure 2 also depicts a GPS receiver 16 that is connected to mobile telephone 14 via interface unit 18. Interface unit 18 calculates latitude, longitude and time information based on data provided by GPS receiver 16. Techniques and circuitry for accomplishing this function are well-known to those skilled in the art. Mobile telephone 14 preferably includes a data input jack whereby the latitude/longitude/time information can be transmitted back to workstation 20 via mobile telephone 14.

In an alternative embodiment, there is also provided auxiliary system 50, which preferably comprises a separate mobile telephone 52 and computer 54, each of which is also connected to interface unit 18. In this alternative embodiment, computer 54 records the call information available from mobile telephone 14 along with the received GPS location information, all via interface unit 18. Preferably mobile telephone 52 is connected to an antenna (not shown) mounted externally to a vehicle involved in the drive test so as to improve, perhaps by 10 or 15 dB, the signal strength of the signal transmitting the call information and GPS information to cell site 10a or 10b. In a preferred embodiment, mobile telephone 52 is configured to be in an auto-answer mode so that the call information from mobile telephone 14 and GPS location information can be obtained substantially in real

time, or alternatively, at a later time by transmitting the call and GPS location information that has been recorded by computer 54.

The call parameter information is preferably transmitted to workstation 20 via links 22a, 22b and parsed such that a standard call monitoring file is

5 dynamically created or a database is populated. The standard file or database preferably has a standard file format like that shown in Figure 3. This standard file format preferably includes a subscriber number, the serving cell site, the channel that is carrying the call, the channel type, forward and reverse signal strengths, and forward and reverse BERs (see Figure 3). It is noted that BER data is applicable only for a digital cellular system. Also, in an analog cellular system, only reverse signal strength is typically available. However, since there are ongoing efforts on the part of the cellular telephone industry to convert all cellular systems to digital systems, the present invention will generally always be able to receive all of the data described thus far.

15 Also included with the data coming from switch 12, as a result of it being placed in a call monitor mode, are the signal strengths of other, neighboring, cell sites. This information is preferably also stored in the standard file format of Figure 3. Further, switch 12 preferably transmits call event information to workstation 20. Call event information includes, for example, indications of hand
20 offs, end call events (e.g., normal end, drop), and new calls. This data is also stored, preferably in the standard file format of Figure 3.

Finally, the standard file format preferably also includes latitude, longitude and timestamp entries for the GPS location information.

As noted, the data received from switch 12 is preferably parsed to extract only the information that is to be stored in the standard file format. The parsed information is then preferably converted or scaled so that it can be easily displayed in the graphical user interface of the present invention. That is, because each switch manufacturer (e.g., Ericsson, Lucent, Hughes) has a different format and order for their call monitoring data, the present invention preferably includes tables and conversion charts to modify the data received into data that can be easily plotted in accordance with the present invention, as will be explained below. Implementation of such tables and conversion charts are well known to those skilled in the art and depend on the switch being accessed and the type of graph being plotted.

Figure 4a is an exemplary screen display in accordance with the preferred embodiment of the present invention. In the upper portion of Figure 4a, graph 200 preferably displays four separate plots (described below). The vertical axis of graph 200 represents signal strength (RSSI) and the horizontal axis tracks call information and time. More specifically, the spacing on the horizontal axis is based on the amount of data, i.e., the amount of call information for a particular call, that there is to plot. The time indication at the bottom right-hand side of graph 200 corresponds to the time of the current message, or call information, being plotted. This time indication is stepped over to the next (leftward) vertical division line

after, e.g., 10 messages are received. The receipt of 10 messages, however, may cover 10 seconds or 30 seconds depending on the nature of the call. For example, if a mobile phone user is stationary with stable signal strength and stable BER, very few changes in call performance data will likely be recorded at the switch. On the other hand, if the user is driving in an urban area while making several calls over a short period of time, numerous “end call”, “new call” messages and cell site hand off events will be recorded by the switch and the graph being plotted will move more quickly to the left as compared to a graph plotting the call of the stationary user.

The reverse and forward signal strengths 205, 210 of the active, or serving, cell site are also plotted in graph 200 of Figure 4a. It is noted that a call's forward signal strength, i.e., the strength of the signal from the cell site to the mobile phone is available only in a digital cellular system (since in such a system the mobile phone returns that information back to the cell site and the information ultimately makes its way to the MTSO, or switch).

In this case, the serving cell site is called “TO17C”, which is indicated both at the top of graph 200 and at the bottom of the screen in text box 261. In a color display environment, each plot is preferably color coded for improved readability, and the color associated with each plot is indicated by the small horizontal bars at the top of Figure 4a. The mobile service subscriber's telephone number is also indicated at the lower left of the screen in text box 260. This is the telephone number of the mobile telephone for which call monitoring is occurring.

Also plotted in graph 200 are the two “neighboring” cell sites 215 and 220 having the highest reverse signal strengths as compared to all other possible cell sites, after the serving cell site. In this case, cell sites “T017B” and “T005B” have the highest signal strengths (“Mobile Scan”) and, accordingly, their data is plotted also in graph 200. Meanwhile, the text boxes at the bottom of the screen also indicate in numerical format in text boxes 270 the signal strengths at the two neighboring cell sites as well as of all other cell sites for which the switch has data for the call being monitored.

Relatively thick vertical bars 230 and 240 indicate a call event such as a hand off or dropped call. The code associated with the call event, e.g., “RR=05” is indicated next to vertical bars 230 and 240 and an explanation of that code may also be indicated in text box 280 just below graph 250.

Graph 250 plots the power level of the mobile phone and the reverse and forward BER. In an analog system, however, BER is not a relevant factor. Accordingly, when an analog system is analyzed, the “plot” of this parameter is set to “-1.”

The bottom of screen of Figure 4a indicates in various text boxes the MIN being monitored in text box 260 and the serving cell site in text box 261. The channel over which the call is taking place is also indicated in text box 262. The current numerical values of the forward and reverse BER and signal strengths are provided in text boxes 263-266. The channel type (digital or analog) is shown in

text box 267 as is the current power level of the mobile phone in text box 268. The numerical values of the signal strengths at all neighboring cell sites are also shown. According to the digital EIA/TIA 136 specification, up to 24 neighbors are permitted. Accordingly, there preferably are 24 individual text boxes 270. In the example shown, only 10 neighbor cell sites are enabled.

Finally, at the bottom right hand corner of the screen display is a sound enable button 290, which when set, causes a predetermined relatively short “audible” indication of a call event that is occurring. For example, if there is a call hand off, a sound card (not shown) in workstation 20 generates the words “hand off” and plays the words at the same time the call event is depicted in graph 200. In this way, even if the RF or cellular engineer is not watching the display screen and graphs being plotted, he will be timely notified of a call event.

It will be appreciated by those skilled in the art that the “look and feel” of the exemplary screen of Figure 4a could be reconfigured in any way found to be pleasing to a user. The actual configuration shown, i.e., how the various data is presented to a user, is provided for example purposes only. The scope of the present invention is not intended to be limited in way by the exemplary screen displays depicted and described.

Figure 4b shows what the exemplary screen of Figure 4a looks like after a period of time. That is, as data is received from switch 12 the plots on graphs 240 and 250 move toward the left, whereby the most recent call monitoring information

is displayed on the right hand side of the graphs. In this way, a dynamic graphical user interface is provided for a user.

Figure 5 depicts an exemplary split screen display in accordance with the present invention in which the GPS location information is utilized. The right-hand side of the screen is a display such as the one shown in Figures 4a or 4b, albeit somewhat compressed to fit into a half-screen space. On the left-hand of the display a map is shown with the position 500 of mobile telephone 14 plotted thereon. Also plotted are the locations of several cell sites 10a, 10b and 10c. Using the data from the serving and neighboring cell sites, color coded markings are used to indicate the received signal strengths at each of three cells sites 10a, 10b and 10c. Thus, the cellular engineer can quickly and easily identify, via a graphical representation, which cell site is the serving cell site and which are neighboring cell sites along with the actual geographical locations of those cell sites. Other cell sites may also be shown on the map. Software for the mapping functionality described herein is well known and can easily be found commercially.

Figure 6 depicts yet another type of display that utilizes the GPS location information transmitted back through the cellular system by mobile telephone 14 or mobile telephone 52. On this map, a data "trail" 600 is plotted that follows the route of the mobile telephone and plots signal strengths (RF levels) or BER. Color codes are preferably assigned to different value ranges whereby the cellular engineer can easily see how telephone call parameters are changing along a particular route.

Figure 7 is a flowchart depicting the method of the present invention. In step 710 one or both mobile telephones 14 and 52 is called and is automatically answered. At step 720 workstation 20 remotely accesses switch 12 via links 22a and 22b. As described above, links 22a and 22b can be implemented via modem or other link, e.g., a LAN, a WAN or the Internet. At step 730, switch 12 is placed into a call monitor mode. At step 735, a MIN is provided to switch 12. Switch 12 thereafter records and transmits to workstation 20 call monitor information related to the identified MIN, step 740, including the GPS location information. At step 745, the data is received at workstation 20 and preferably stored in a temporary file as necessary. At step 750 the stored data is parsed, converted and/or scaled to place the data in a common format that can be easily plotted and displayed. During step 755, a standard format file or database is populated with the parsed, converted and/or scaled data from step 750 and then at step 760 the call monitor information is plotted and displayed, e.g., in a graphical user interface similar to the forms shown in Figures 4a-6. At step 765 it is determined whether any new call monitor (parameter) information has since been received. If not, the process ends. If there is new data (new call monitor information) that has since been received, then the process returns to step 750 where the new call monitor information is parsed, converted and/or scaled.

It is noted that the data from the switch may not be received in actual “real time.” There may be download delays due to, e.g., switch traffic, whereby the switch may not be able to immediately (i.e., in actual real time) transmit the data to

workstation 20. Generally speaking, however, there is usually not more than a one or two minute delay and thus a substantially real time remote call monitoring system is achieved by the present invention. Delay in the receipt of data from the switch does not cause any problems with respect to the GPS location information since that information is received with a timestamp that permits synchronization with the call parameter information being received.

The foregoing disclosure of the preferred embodiment of the present invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many variations and modifications of the embodiment described herein will be obvious to one of ordinary skill in the art in light of the above disclosure. The scope of the invention is to be defined only by the claims appended hereto, and by their equivalents.

WHAT IS CLAIMED IS:

1. A method of monitoring a cellular call, comprising the steps of:

(a) remotely accessing a switch at a first location, the switch servicing one or more cellular sites in a cellular system;

5 (b) remotely placing the switch in a call monitor mode to monitor a mobile telephone;

(c) recording, at the switch, call information related to a cellular call being conducted by the mobile telephone;

(d) transmitting the call information to a second location;

10 (e) storing, at the second location, the call information as data in a standard file format; and

(f) displaying the data in a graphical format,

wherein the call information includes position information for the mobile telephone.

15

2. The method of claim 1, further comprising receiving position information via a GPS receiver.

3. The method of claim 2, further comprising transmitting the position
20 information over the cellular system.

4. The method of claim 1, wherein at least one of steps (a), (b) and (d) occurs over at least one of a hard wire and a wireless link.

5. The method of claim 1, wherein step (f) comprises the step of displaying at least one of call signal strength and bit error rate.

6. The method of claim 1, wherein step (f) comprises the step of displaying a plot of signal strength and a plot of bit error rate.

7. The method of claim 1, wherein the graphical format includes a map.

8. The method of claim 1, further comprising the step of at least one of parsing, converting and scaling the call information to generate the data.

9. The method of claim 1, further comprising the step of displaying the identity of a serving cell site that is the cell site over which the cellular call is taking place.

10. The method of claim 1, further comprising displaying on a map a serving cell site and cell sites that neighbor the serving cell site.

11. The method of claim 1, further comprising the step of plotting a graph of the data and indicating when a call event has occurred.

12. The method of claim 1, further comprising the step of providing an
5 audible indication of a call event.

13. A method of monitoring the performance of a cellular telephone call,
comprising the steps of:

(a) calling a first mobile telephone that is configured to be in an auto-answer
10 mode;

(b) receiving GPS location information indicative of the location of the first
mobile telephone;

(c) recording data on a first computer, the data comprising telephone call
parameter information available from the first mobile telephone and the GPS
15 location information;

(d) calling a second mobile telephone that is in communication with the first
computer;

(e) transmitting via the second mobile telephone the data recorded on the
first computer;

20 (f) configuring a cellular telephone system switch to be in a call monitor mode
and recording cellular system information with respect to the first mobile telephone;

(b) forwarding the data and cellular system information with respect to the first mobile telephone to a second computer; and

(c) graphically displaying the data and cellular system information with respect to the first mobile telephone.

5

14. The method of claim 13, further comprising graphically identifying when a call event has occurred.

15. The method of claim 13, wherein the second mobile telephone is configured to be in an auto-answer mode.

16. The method of claim 13, wherein the second mobile telephone has an antenna mounted on the exterior of a vehicle.

17. The method of claim 13, further comprising at least one of the steps of parsing, converting and scaling the cellular system information.

18. The method of claim 13, further comprising the step of plotting a graph of at least one of signal strength and bit error rate.

19. The method of claim 13, further comprising the step of indicating the signal strength at cell sites other than a serving cell site.

20. The method of claim 13, further comprising the step of audibly indicating that a call event has occurred.

5 21. The method of claim 13, further comprising the step of continually graphically displaying the data and cellular system information after new such data or information is received.

22. The method of claim 13, further comprising mounting or installing, respectively, a plurality of at least the first mobile telephones in a plurality of service vehicles, and monitoring any one of the first mobile telephones.

23. A system for monitoring call performance in a cellular telephone system, comprising:

15 (a) a cellular switch operable to be remotely placed in a call monitor mode, said switch further being capable of recording cellular system information upon being placed in the call monitor mode and subsequently downloading recorded cellular system information;

(b) a GPS receiver connected to a first mobile telephone via an interface unit;

20 and

(c) a first computer including a display, the first computer being operable to

(i) remotely access the switch, (ii) remotely place the switch in the call monitor

mode, (iii) receive and store recorded cellular system information and GPS location information relative to the first mobile telephone and (iv) graphically display the call information in combination with the GPS location information.

5 24. The system of claim 23, wherein the first mobile telephone is configured to be in an auto-answer mode.

25. The system of claim 23, further comprising a second mobile telephone and second computer each connected to the interface unit.

26. The system of claim 25, wherein the second computer records call parameter information available from the first mobile telephone.

15 27. The system of claim 25, wherein the second mobile telephone is configured to be in an auto-answer mode.

28. The system of claim 23, wherein the first computer is operable to display the cellular system information and GPS location information in real or near real time.

20

29. The system of claim 23, wherein at least one of the first and second computers is operable to perform at least one of parsing, converting and scaling the call information.

5 30. The system of claim 23, wherein the first computer is operable to graphically display at least one of signal strength, bit error rate and call events of a cellular call and a map including the location of the first mobile telephone.

31. The system of claim 23, wherein the first computer is operable to simultaneously display the signal strengths of cell sites that neighbor a serving cell site.

32. The system of claim 23, wherein the first computer is operable to audibly indicate when a call event has occurred.

ABSTRACT OF THE DISCLOSURE

A system for and method of cellular telephone system monitoring includes a cellular switch which is remotely accessed and placed in a call monitor mode. A GPS receiver is connected to a mobile telephone via an interface unit. Call performance information (e.g., signal strength, BER and call events) are recorded at the switch and downloaded to a remote computer that includes a display. GPS location information is transmitted by the mobile telephone and received by the remote computer via the switch. The computer receives and stores the recorded call and GPS information and graphically displays this information, along with a map indicating the location of the mobile telephone. Preferably, the call information is first parsed, converted and/or scaled to conform to a standard file format.

Document # 954992 v 1

```

07:42:00      CLR Call Monitor: Call RSSI value
4113      Source: 6      CCP0
                        (407)3250010 cell 201 frssi -81 rrssi -83 attn 2
fber 0 rber 0      Object: 20      A      TC 780
                        Class: XXXXXXXXXXXXXXXX
Domain:2      BTS:1 Chassis:      Slot:0      Port:
07:42:00      CLR Call Monitor: Adjacent cell RSSI values from mobile
4116      Source: 6      CAP2
                        (407)3250010 Cell_id/RSSI: 32/-97 202/-113 491/-103
Object: 6      CAP2
                        Class: XXXXXXXXXXXXXXXX
Domain:2      Chassis:6      Slot:11      Port:
07:42:00      CLR Call Monitor: Adjacent cell RSSI values from mobile
4116      Source: 6      CAP2
                        (407)3250010 Cell_id/RSSI: 412/-87 323/-109 203/-103
Object: 6      CAP2
                        Class: XXXXXXXXXXXXXXXX
Domain:2      Chassis:6      Slot:11      Port:
07:42:00      CLR Call Monitor: Adjacent cell RSSI values from mobile
4116      Source: 6      CAP2
                        (407)3250010 Cell id / RSSI: 1353/-113
Object: 6      CAP2
                        Class: XXXXXXXXXXXXXXXX
Domain:2      Chassis:6      Slot:11      Port:
07:42:01      CLR Call Monitor: Call RSSI value
4113      Source: 6      CCP0
                        (407)3250010 cell 201 frssi -81 rrssi -84 attn 2
fber 0 rber 0      Object: 20      A      TC 780
                        Class: XXXXXXXXXXXXXXXX
Domain:2      BTS:1 Chassis:      Slot:0      Port:
07:42:01      CLR Call Monitor: Call Handoff has taken place
4104      Source: 2      CCP0
                        Ph#:(407)3250010 Handoff from 201 to 32
Object: 3      B      TC 755
                        Class: XXXXXXXXXXXXXXXX
Domain:1      BTS:2 Chassis:      Slot:0      Port:
07:42:01      CLR Call Monitor: Call Path Assigned
4101      Source: 2      CCP0
                        Ph#:(407)3250010 Handin connect E1: 0, 7 T1: 0, 4
755 TDMA-3      Object: 3      B      TC 755
                        Class: XXXXXXXXXXXXXXXX
Domain:1      BTS:2 Chassis:      Slot:0      Port:
07:42:01      CLR Call Monitor: Adjacent cell RSSI values from mobile
4116      Source: 6      CAP2
                        (407)3250010 Cell_id/RSSI: 32/-97 202/-113 491/-101
Object: 6      CAP2
                        Class: XXXXXXXXXXXXXXXX
Domain:2      Chassis:6      Slot:11      Port:

```

Figure 1

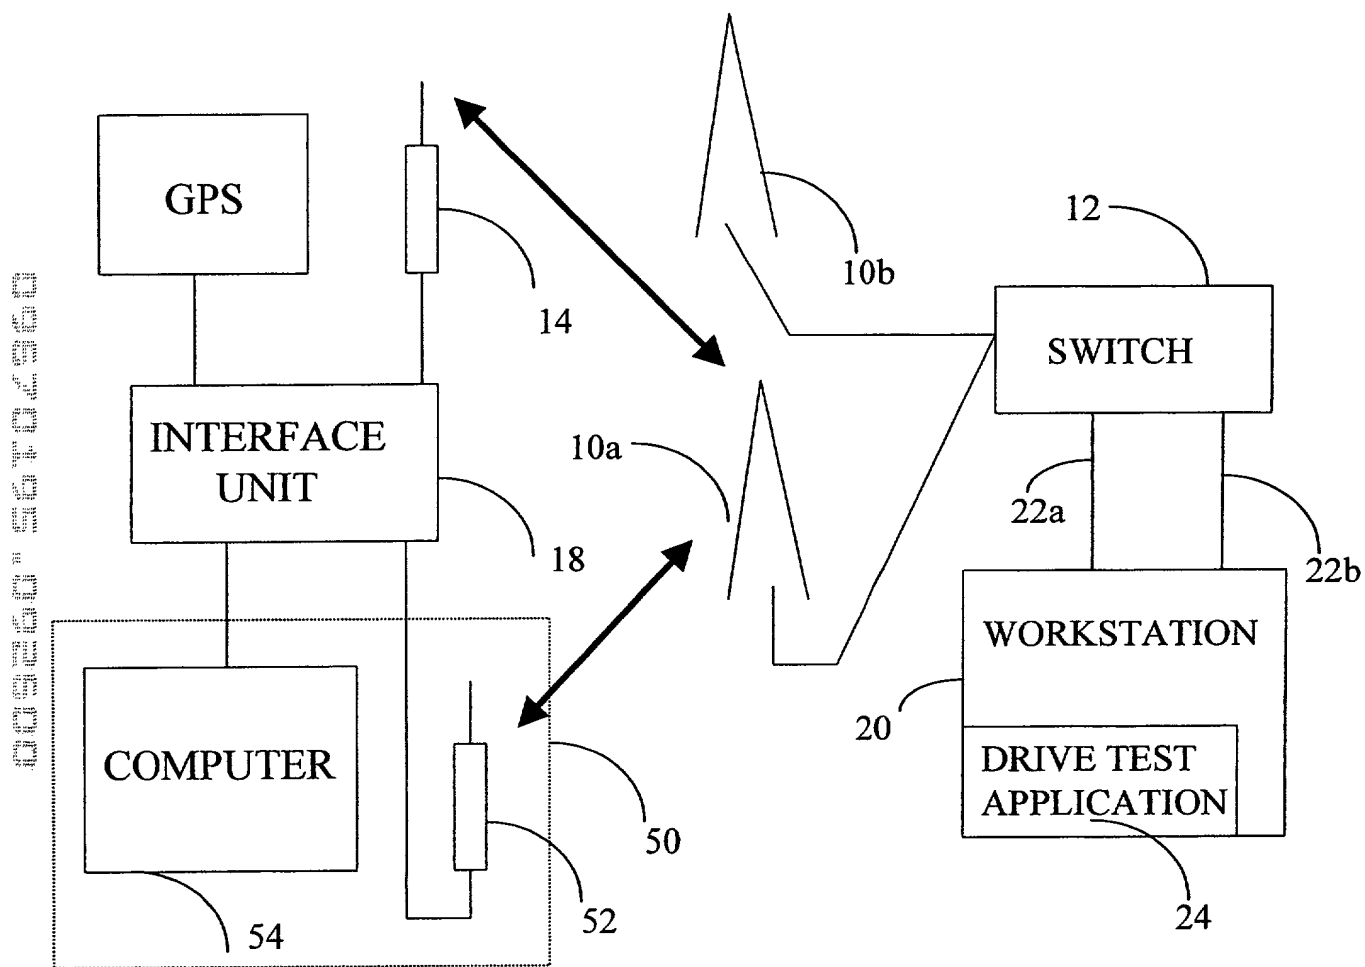


Figure 2

STANDARD FILE FORMAT

Subscriber Number

Serving cell site

Channel

Channel type

Mobile power

$F_RSSI_1, F_RSSI_2, \dots, F_RSSI_n$

$R_RSSI_1, R_RSSI_2, \dots, R_RSSI_n$

$F_BER_1, F_BER_2, \dots, F_BER_n$

$R_BER_1, R_BER_2, \dots, R_BER_n$

$Call_event_1, Call_event_2, \dots, Call_event_n$

$NEIGHBOR_RSSI_1, NEIGHBOR_RSSI_2, \dots, NEIGHBOR_RSSI_n$

$TimeStamp_1, Lat/Long_1, \dots, TimeStamp_n, Lat/Long_n$

:

:

:

Figure 3

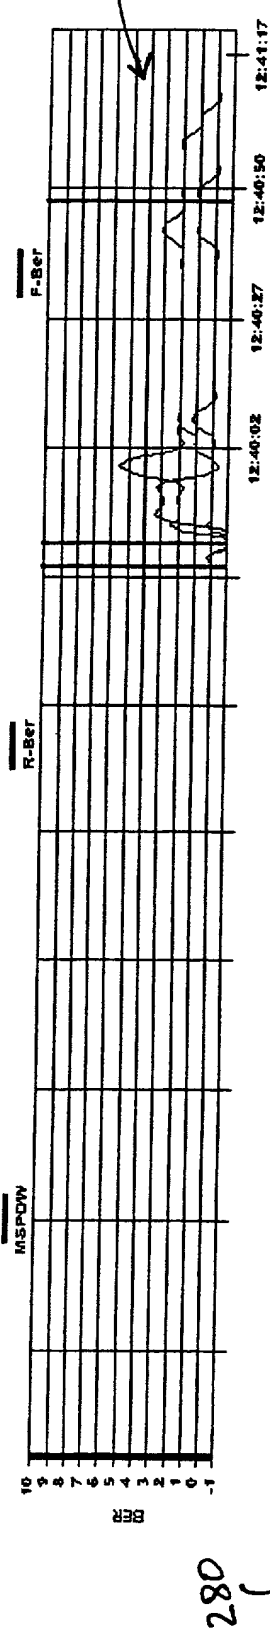
[illegible]

Figure 4a

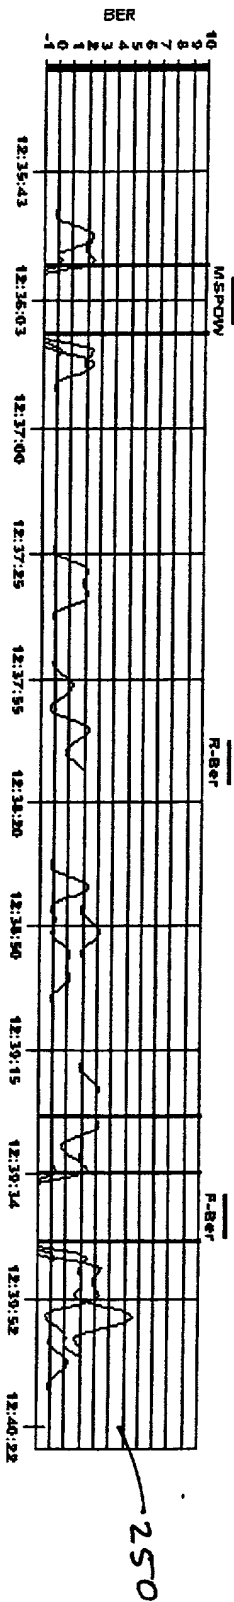
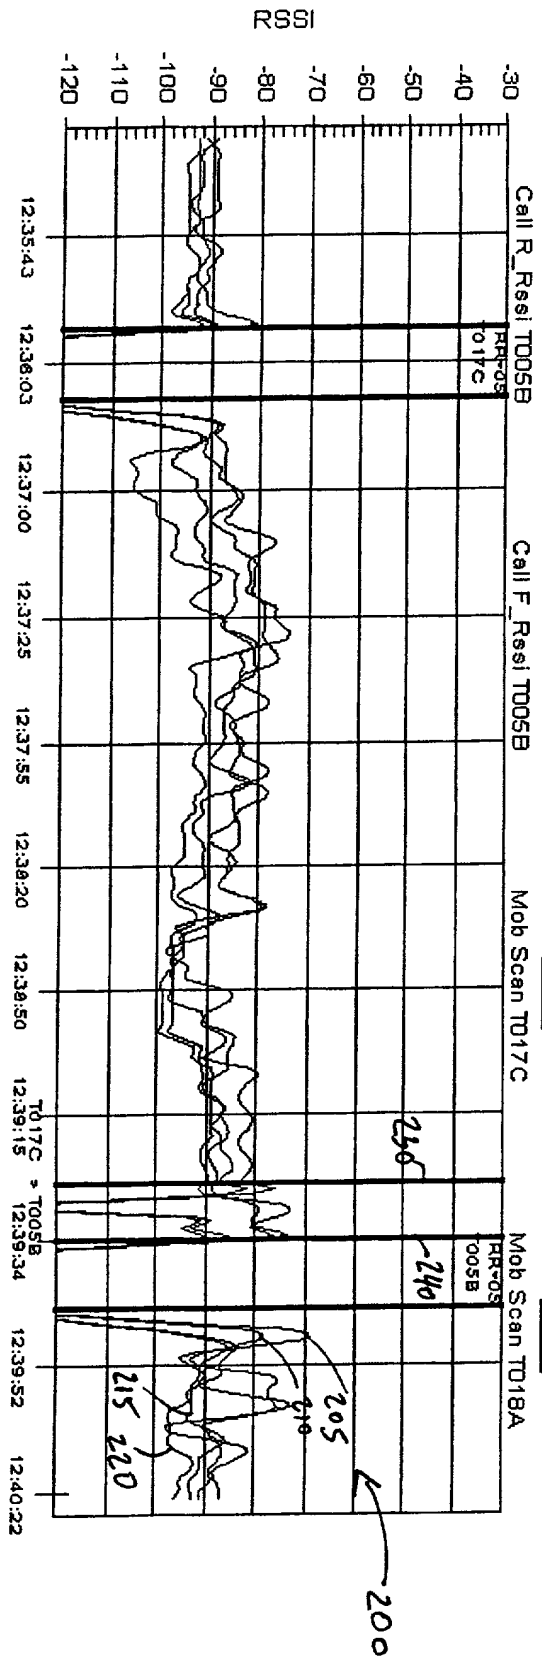
[illegible]

Figure 4B

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

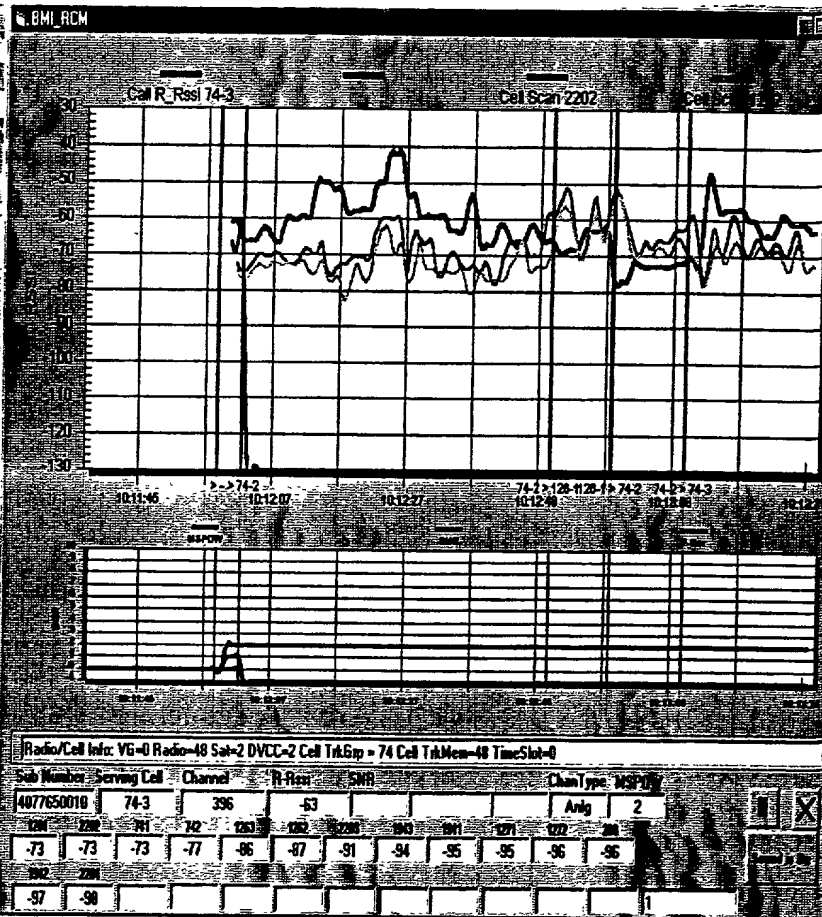
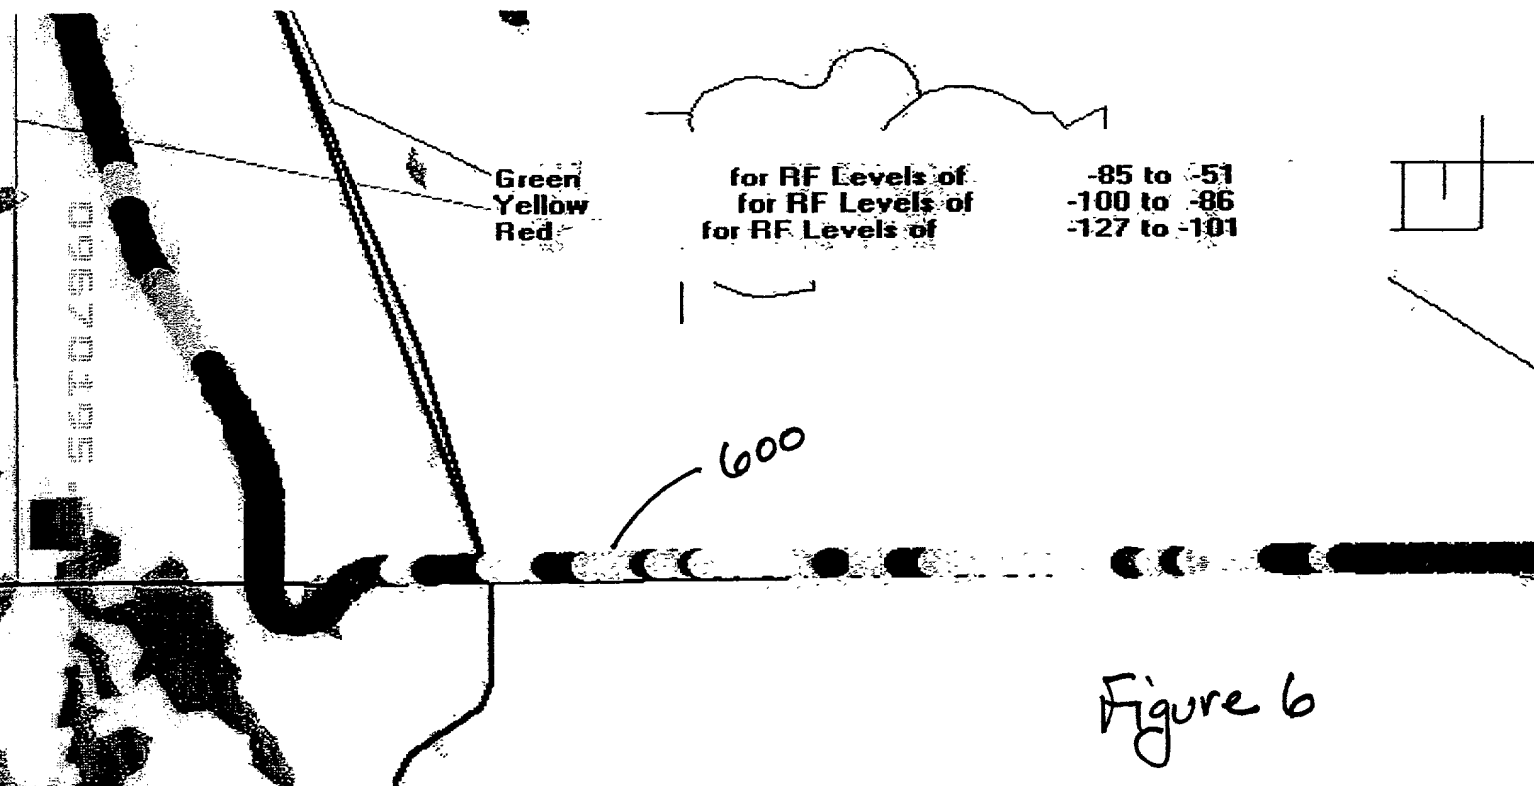


Fig. 5



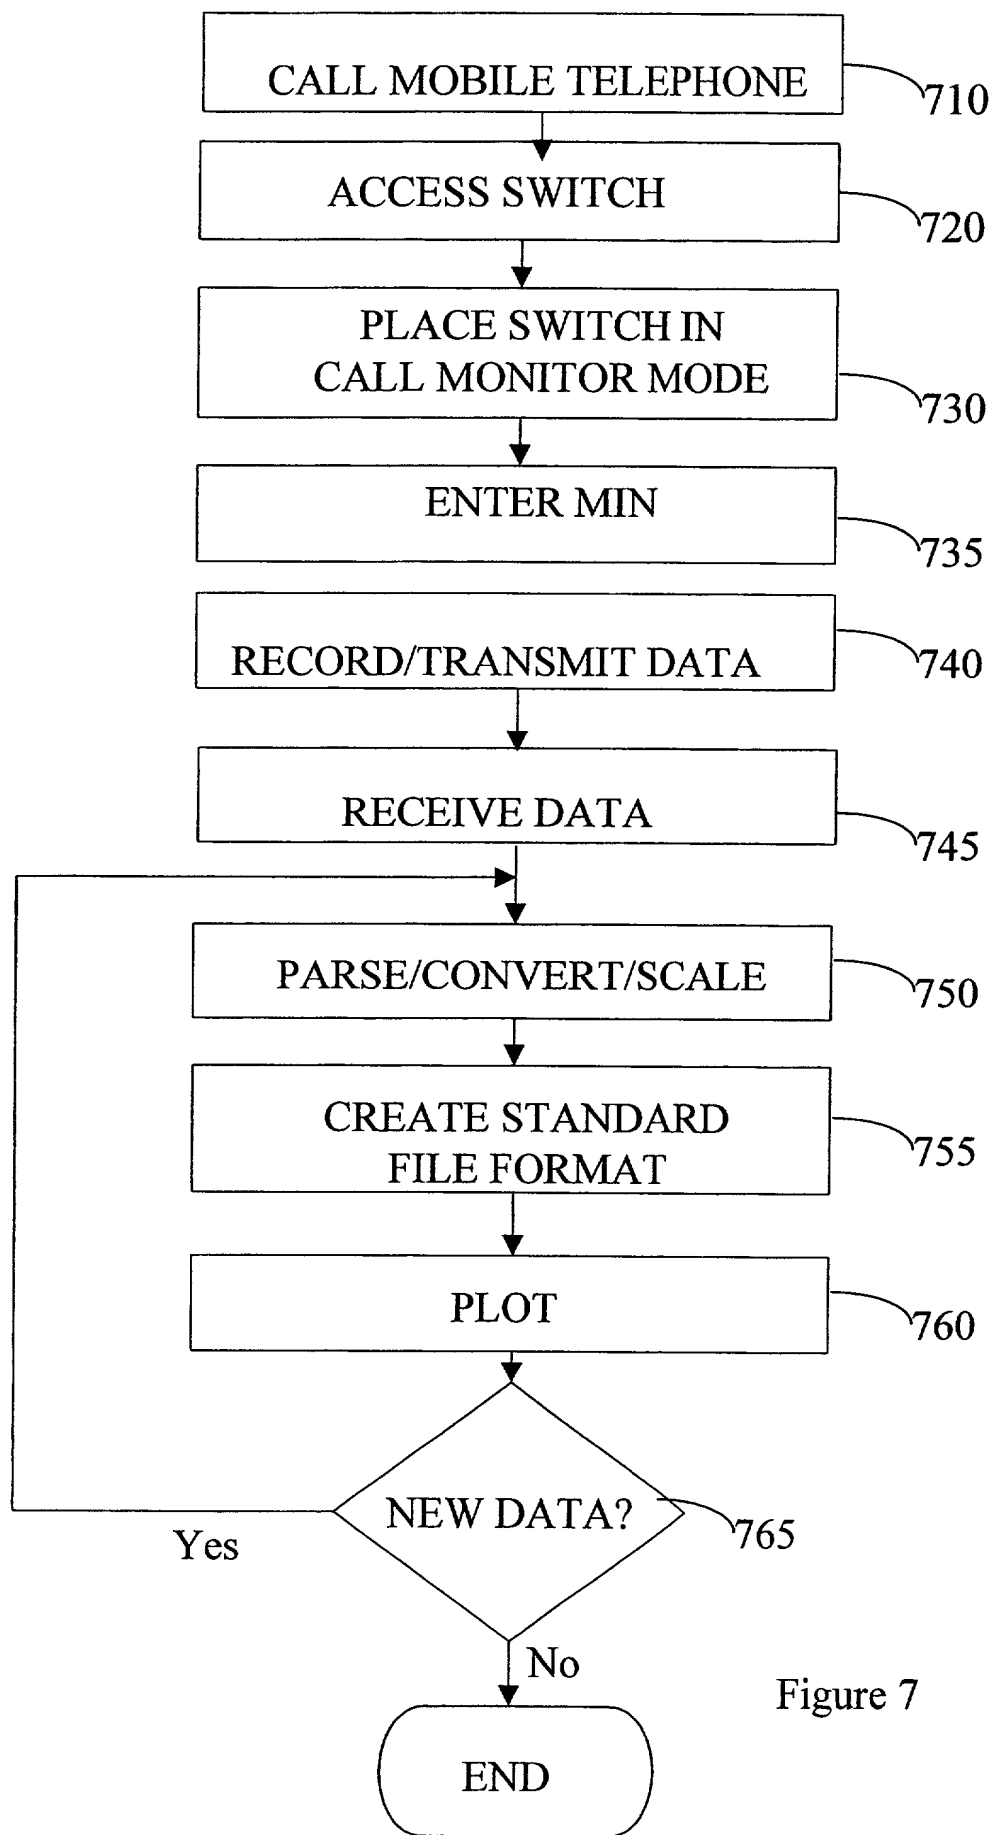


Figure 7

Docket No.
BS00-007

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CELLURAL COMMUNICATIONS DRIVE TEST SYSTEM AND METHOD

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Not Claimed
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

09/604,755

June 28, 2000

pending

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Lawrence J. Gotts - Reg. No. 31,163
 Michael D. Bednarek - Reg. No. 32,329
 Aslan Baghdadi - Reg. No. 34,542
 Elizabeth M. Roesel - Reg. No. 34,878
 David C. Isaacson - Reg. No. 38,500
 Michael S. Lee - Reg. No. 41,434

Michele M. Burris - Reg. No. 44,576
 Michael A. Oblon - Reg. No. 42,956
 Lawrence D. Eisen - Reg. No. 41,009
 Robin L. Teskin, Reg. No. 35,030
 James M. Ross, Reg. No. 42,115
 Samir Elamrani, Reg. No. 43,601
 Bonnie Weiss, Reg. No. 43,255
 Steven P. Arnheim, Reg. No. 43,475
 Poh C. Chua, Reg. No. 44,615

all of: SHAW PITTMAN
 2300 N Street, N.W.
 Washington, D.C. 20037

Send Correspondence to: Lawrence D. Eisen, Esq.
 SHAW PITTMAN
 2300 N Street, N.W.
 Washington, D.C. 20037

Direct Telephone Calls to: *(name and telephone number)*
 Lawrence D. Eisen (202) 663-8893

Full name of sole or first inventor Daniel E. Martin	
Sole or first inventor's signature	Date
Residence Casselberry, Florida	
Citizenship U.S.A.	
Post Office Address 1522 Canterbury Circle	
Casselberry, Florida 32707	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	